



Dry Noodles Production Systems


GMX-1600



Daily handling capacity up to 100 tons.

- Roller width is 1600mm. One divides into two with stable production.
- Automatic finishing system prevents rod block. Rod supply speed is 24 rods/min.
 Drying time: use medium and low temperature type, also accept
- Drying time: use medium and low temperature type, also accept customization.










Drying system



Dry Noodles Production Systems

GMX-1600

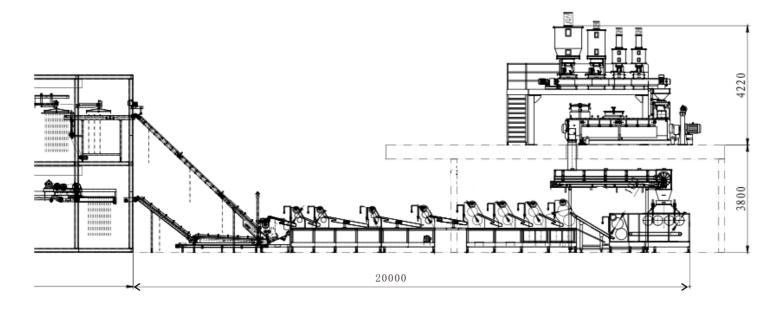

GMX-1600		
Kneading type	Continuous	
Roller width	1600	
Drying time(h)	4.5	
※ Design according to customers' requirements		



Equip with concentrated lubricating system to ensure inject lube for every lubricating spot. Simple and quick maintenance with high efficiency.



Use 100 GS magnetic rod, effectively adsorb iron materials witch may enter and damage slitter.



Monitor the rolling pressure and prevent metal materials entering into roller and slitter to keep equipments and staff safe.



尚寶泰科技機械有限公司 SHANG BAO TAI TECHNOLOGY MACHINERY COMPANY LIMITED. 尚宝泰机械科技(昆山)有限公司 SHANG BAO TAI MECHANICAL SCIENCE AND TECHNOLOGY (KUNSHAN) CO., LTD. 泰 志 機 械 (深圳) 有限公司 TAI ZHI MACHINERY (SHENZHEN) COMPANY LIMITED.